DAKTRONICS QUOTE # 654895-1-0

RGM and Associates
Ridge Greene
3230 Monument Way
Concord, CA USA 94518
Phone: (925)671-7717
Fax: (925)671-7788
Email: ridge@rgmassociates.com

18/May/2018
Quote valid for: 90 days
Terms: Payment With Order
Subject to Credit Review
FCA: DESTINATION
Delivery: Call for Production Time

Reference: San Leandro-Baseball

Item No.	Model	Description	Qty	Price
1	**BA-2017-R-PV-F**	**PanaView® Baseball/Softball Scoreboard; Scoreboard Color: _____; Caption Color: _____; Caption Choice (Pitch Count, At Bat, H/E, or Time): _____** Cabinet Dimensions: 6' 0" H X 14' 0" W X 0' 8" D (Approx. Dimensions) Digit Type: PANAVIEW Digit Color: RED Max Power: 300 watts/display Weight: Unpackaged 300 lbs per display; Packaged 616 lbs per display	**2**	**$11,990.00**
	NOTE This scoreboard is also available in Amber and White (White LED Color requires an Additional Charge).		1	
	AS-1600 Kit	All Sport® 1600 Control Console Kit	2	
	Outdoor Scoreboard Wire Communication	Communication Type: Wire (Cable not included)	2	
	Stripe; 0A-1091-0185	Border Stripe for BA-2017 Scoreboards; Color:_____	2	
	I-Beam Mounting Method (A)	For 2 I-Beams	2	
2	**FREIGHT**	**Shipping to site**	**1**	**$1,065.00**
Services				
3	**G5C5-W**	**Five Year Warranty - Parts Coverage - G5G5**	**1**	

Total Price Excluding Sales Tax: $13,055.00

Please reference listed sales literature: DD1628383 for G5C5-W, DD2118169 for BA-2017-R-PV-F, SL-04352 for AS-1600 Kit, SL-04370 for Outdoor Scoreboard Radio Communication (Transmitter), SL-04370 for Radio Receiver

Options

Please contact your sales representative for additional information

Outdoor Scoreboard Radio Communication (Transmitter)		**Frequency of 2.4 GHz**	**2**	**$1,650.00**
	Radio Receiver	Frequency of 2.4 GHz	2	
Angle Clamp Mounting Method (A)		**For 2 Tubes**	**2**	

Leasing Program
If your purchase exceeds $25,000, you may qualify for our leasing program allowing you more flexibility to spread out the cost of your Daktronics display over of a period up to five (5) years. Benefits of our leasing program include fixed rate financing, non-appropriation clause, no prepayment penalty, and customizable payment schedules. Plus, at the end of the lease, the equipment is yours to keep with no additional balloon payments.

Sample payment options as follows:
$50,000 in total equipment cost = $10,700 per year
$100,000 in total equipment cost = $21,199 per year
$250,000 in total equipment cost = $52,899 per year
Payments based on 5 year/annual payment in advance structure. **Leasing is subject to credit approval and agreed upon documentation with Daktronics lending partner. Contact your Daktronics representative for additional options and details.

Exclusions:

- **Electrical Installation**
- **Structure**
- **Power**
- **Technical Support/Installation Support**
- **Signal Conduit**
- **Applicable Permits**
- **Electrical Switch Gear or Distribution Equipment**
- **Physical/Mechanical Installation**
- **Foundation**
- **Hoist**
- **Engineering Certification**
- **Labor to Pull Signal Cable**
- **Taxes**
- **Front End Equipment**

Unless expressly stated otherwise in this Quote # 654895-1 Rev 0 or the attachments, if Daktronics performs installation of the Equipment, the price quoted does not include the following services pertaining to physical installations: digging of footings (including dirt removal), any materials fabrication, installation of steel cages, rebar, or bolt attachments, or pouring and finishing of concrete footings. Those service may be provided for an additional cost beyond the quoted price. Purchaser shall be fully responsible for any and all additional costs plus overhead in the event anything unexpected of any nature whatsoever is found while digging the footings including but are not limited to rock, water, utility lines, pipes or any other unforeseen circumstance. The Purchaser acknowledges and agrees that it is fully responsible for all site conditions.

Installation Responsibilities:

If applicable please reference Attachment A for Installation Responsibilities.

Ad/ID Copy Approval Process

Daktronics will process your proofs on orders that include advertising and identification panels. Your digital files and copy layouts should conform to graphic file standards document, SL-04116. The digital data files and copy layouts must be submitted at the time of your order and our proofs need to be approved two weeks prior to your initial anticipated ship date. Advertising and identification panels not receiving proof approvals in time will be shipped without copy in our standard finish.

Chris Wagoner
PHONE: 510-579-4431
FAX: 605-697-4746
EMAIL: Chris.Wagoner@daktronics.com

Gary Delaney
PHONE: 605-692-0200
FAX: 605-692-0381
EMAIL: Gary.Delaney@daktronics.com

Terms And Conditions:

The Terms and Conditions which apply to this order available on request.

SL-02375 Standard Terms and Conditions of Sale	(www.daktronics.com/terms_conditions/SL-02375.pdf)
SL-02374 Standard Warranty and Limitation of Seller's Liability	(www.daktronics.com/terms_conditions/SL-02374.pdf)
SL-07862 Software License Agreement	(www.daktronics.com/terms_conditions/SL-07862.pdf)
SL-04116 Graphic File Standards	(www.daktronics.com/terms_conditions/SL-04116.pdf)

Acceptance:

The Undersigned has actual authority to execute this document and Daktronics, Inc is relying upon such authority.

The parties hereby acknowledge and agree that the terms and conditions contained within this Quote along with the terms and conditions of the Daktronics Standard Terms and Conditions, the Standard Warranty and Limitations of Liability, and/or the Software License Agreement (together, the "Terms and Conditions") constitute the full and final understanding of the parties regarding the sale of equipment and/or the provision of services and entirely replace and supersede any previous understanding or agreement between the parties. By executing this agreement, Purchaser acknowledges that it has had opportunity and means to review the Terms and Conditions as provided in the website addresses above. In the alternative, hardcopy of these Terms and Conditions will be provided upon request. Further it is acknowledged and agreed that the price of the equipment and/or the provision of services contained within this agreement are expressly conditioned upon Purchaser's acceptance of the Terms and Conditions without change. Any modification of the Terms and Conditions may require a corresponding change in price. Accordingly, the Purchaser acknowledges and agrees to these Terms and Conditions as evidenced by its attestation below.

Customer Signature _____ Date _____

Print Name _____ Title _____

Purchase Order Information:

RGM and Associates PO# _____ PO Date _____

Purchaser hereby confirms that the equipment is to be delivered to, and may be installed by Purchaser or Daktronics (as indicated elsewhere herein) at the address indicated on page one (1) of the agreement unless otherwise specified below:

☐ Same as Bill to

Ship To:

Company

Contact Person

Address

City

State Zip

Telephone

Fax

Email

☐ Same as Ship to

End User:

*Company

Contact Person

Address

*City

*State *Zip

Telephone

Fax

Email

*Required Information

BILL TO (if different from quoted address):

Company

Contact Person

Address

City


State Zip

Telephone

Fax

Email

DAKTRONICS BA-2017 PRODUCT SPECIFICATIONS

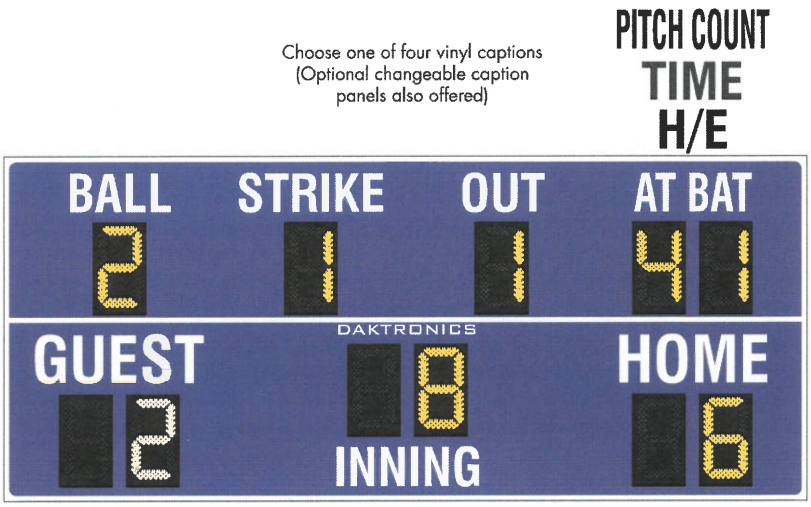

This outdoor LED baseball/softball scoreboard displays HOME and GUEST scores to 99, INNING to 19, BALL to three, STRIKE to two, OUT to two and AT BAT to 99. Scoreboard can display H/E (hit or error), TIME or PITCH COUNT instead of AT BAT. Scoreboard shown with amber PanaView® digits and optional border striping (center stripe comes standard).

DIMENSIONS	UNCRATED WEIGHT	POWER (120 VAC)*	
6'-0" H x 14'-0" W x 8" D (1.83 m, 4.27 m, 203 mm)	216 lb (98 kg)	Red/Amber Digits	130 Watts, 1.1 Amps
		White Digits	290 Watts, 2.4 Amps

**Scoreboard requires a dedicated circuit. Models with 240 VAC power at half the indicated amperage are also offered (International Use Only).*

DIGITS
- All digits are 18" (457 mm) high.
- Select red, amber, or white LED digits.
- Scoreboard features robust weather-sealed digits (see DD2495646).
- Digits may be dimmed for night viewing.

CAPTIONS
- HOME and GUEST captions are 10" (254 mm) high. All other captions are 8" (203 mm) high.
- Standard captions are vinyl, applied to the display face.

DISPLAY COLOR
Choose from 150+ colors (from Martin Senour® paint book) at no additional cost.

CONSTRUCTION
Alcoa aluminum alloy 5052 for excellent corrosion resistance

PRODUCT SAFETY APPROVAL
ETL listed to UL 48, tested to CSA standards, and CE labeled

OPERATING TEMPERATURES
- Display: -22° to 122° Fahrenheit (-30° to 50° Celsius)
- Console: 32° to 130° Fahrenheit (0° to 54° Celsius)

WWW.DAKTRONICS.COM E-MAIL: SALES@DAKTRONICS.COM

201 Daktronics Drive, PO Box 5128, Brookings, SD 57006
Phone: 1-800-325-8766 or 605-692-0200 Fax: 605-697-4746

DAKTRONICS

DAKTRONICS BA-2017 PRODUCT SPECIFICATIONS

CONTROL CONSOLES	CONTROL OPTIONS
All Sport® 1600* (see SL-04352) **May be upgraded to* ***All Sport 5000*** *(see SL-03991)*	***Wired (standard):*** One-pair shielded cable of 22 AWG minimum is required. A cover plate with mounted connector and standard 2" x 4" x 2" (51 mm x 102 mm x 51 mm) outlet box is provided. Connector mates with signal cable from control console. ***Wireless (optional):*** 2.4 GHz spread spectrum radio features 64 non-interfering channels and 8 broadcast groups (see SL-04370).
RC-100 (see SL-07397)	***Optional*** wireless handheld controller features 900 MHz spread spectrum radio with 15 non-interfering channels and up to 10 hours of operation via internal rechargeable battery. *Not compatible with PITCH COUNT.*

TIME CLOCK
The two-digit clock can display hours/minutes/seconds. Clock information shifts from hours to minutes to seconds as time counts down.

MOUNTING
Scoreboard is typically mounted on two vertical beams or poles. Hardware to mount scoreboard on two beams is included; hardware for more beams is at additional cost. Standard mounting uses I-beam clamps. Optional mounting method using angle brackets is also offered; maximum beam width is 12" (305 mm) and maximum beam depth is 22" (559 mm). Refer to attached drawings for more information on mounting methods.

SERVICE ACCESS
Digit panels and electronics are serviced from the front of the scoreboard.

GENERAL INFORMATION
Scoreboard provides scoring capabilities for two teams. 100% solid state electronics are housed in an all aluminum cabinet. Scoreboard is shipped in one section. Scoreboard power is to be provided on a dedicated circuit to prevent loss of game information due to failure of another component on the circuit. Specifications and pricing are subject to change without notice.

OPTIONS & ACCESSORIES
- Scoreboard border striping (center stripe comes standard)
- Multiple caption and striping colors (see DD2101644)
- Team name caption in place of HOME
- H/E (hit/error), TIME or PITCH COUNT* captions on changeable panels
- Team names on changeable panels
- Individual digit protective screens (see SL-04939)
- Protective netting (see DD2690927)
- Optional angle bracket mounting method
- Advertising/identification panels
- Decorative accents
- Electronic message centers and video displays in multiple sizes

** All Sport 1600 or 5000 console required to display PITCH COUNT*

ADVERTISING/IDENTIFICATION PANELS

Backlit & Non-Backlit:

1'-6" H x 14'-0" W (457 mm, 4.27 m)
2'-0" H x 14'-0" W (610 mm, 4.27 m)
2'-6" H x 14'-0" W (762 mm, 4.27 m)
3'-0" H x 14'-0" W (914 mm, 4.27 m)

For additional non-backlit panel sizes, see SL-03761.

FOR ADDITIONAL INFORMATION
- Installation Specifications: DWG-1157187 (attached)
- Standard I-beam Mounting: DWG-1052565 (attached)
- Optional Pole Mounting: DWG-1048184 (attached)
- Component Locations: DWG-1066282 (attached)
- Architectural Specifications: See SL-07637

All Sport® and PanaView® are trademarks of Daktronics, Inc.
Martin Senour® is a registered trademark of its owner.
 Copyright © 2011-2015 Daktronics, Inc.

DAKTRONICS